




PRIV. DE RIO SANTIAGO #30 COL. LA RAZA SOLEDAD DE GRACIANO SANCHEZ SAN LUIS POTOSI, C.P. 78433

'N' SERIES SINGLE OPAQUE DOOR "NON-IMPACT" OUTSWING

- 1. This product has been evaluated and is in compliance with the 2007 Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
- 2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
- 3. When used in areas requiring wind borne debris protection this product is required to be protected with an impact resistant covering that complies with Section 1609.1.2 of the 2007 FBC.
- 4. The "N" door achieves a Class III stiffness classification per Section 8.2.2 of ANSI A250.13.
- 5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS				
SHEET #	DESCRIPTION			
1	Typical elevation, design pressures & general notes			
2	Door panel details			
3	Horizontal cross sections			
4	Horizontal cross sections			
5	Horizontal cross sections			
6	Vertical cross sections			
7	Buck and frame anchoring			
8	Anchoring details			
9	Components			
10	Bill of materials and components			

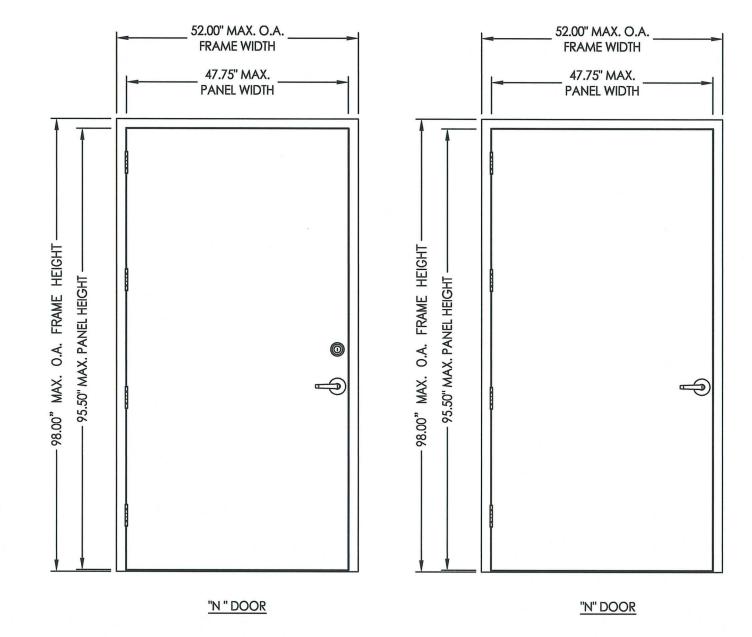

DOOR	OVERALL FRAME DIMENSION	LOCK TYPE	DESIGN PRESSURE (PSF)	
TYPE		LOCK TYPE	POSITIVE	NEGATIVE
	52.00" × 98.00"	DESIGN LATCH & DEADBOLT	+45.0	-45.0
N		SCHLAGE LATCH & DEADBOLT	+45.0	-45.0
		SCHLAGE LATCH	+45.0	-45.0

Instrucciones de Instalación y Más Detalles Installation Instructions and More Details

			REVISIONS					
ШЦ				ING.				
		DATE		009 R.W. BUILDING CONSULTANTS INC.				
		S		OON				
TE: 02/18/09								
TE: 02/18/09 CALE: N.T.S.								
VG. BY: JK								
IK. BY: LFS								
AWING NO.:								
FL-12161.2								

— PANELS "NON—IMPACT"