


PRIV. DE RIO SANTIAGO #30 COL. LA RAZA SOLEDAD DE GRACIANO SANCHEZ SAN LUIS POTOSI, C.P. 78433

## SINGLE GLAZED DOOR 1/2 LITE "IMPACT" OUTSWING

## **GENERAL NOTES**

- This product has been evaluated and is in compliance with the 2007 Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
- 2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
- 3. When used in areas requiring wind borne debris protection this product complies with Section 1609.1.2 of the FBC and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E1996.
- 4. The "N" door achieves a Class III stiffness classification per Section 8.2.2 of ANSI A250.13 (based on opaque door).
- 5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS						
SHEET #	DESCRIPTION					
1	Typical elevation, design pressures & general notes					
2	Door panel details					
3	Horizontal cross sections					
4	Horizontal cross sections					
5	Horizontal cross sections					
6	Vertical cross sections					
7	Buck and frame anchoring					
8	Anchoring details					
9	Components					
10	Bill of materials and components					

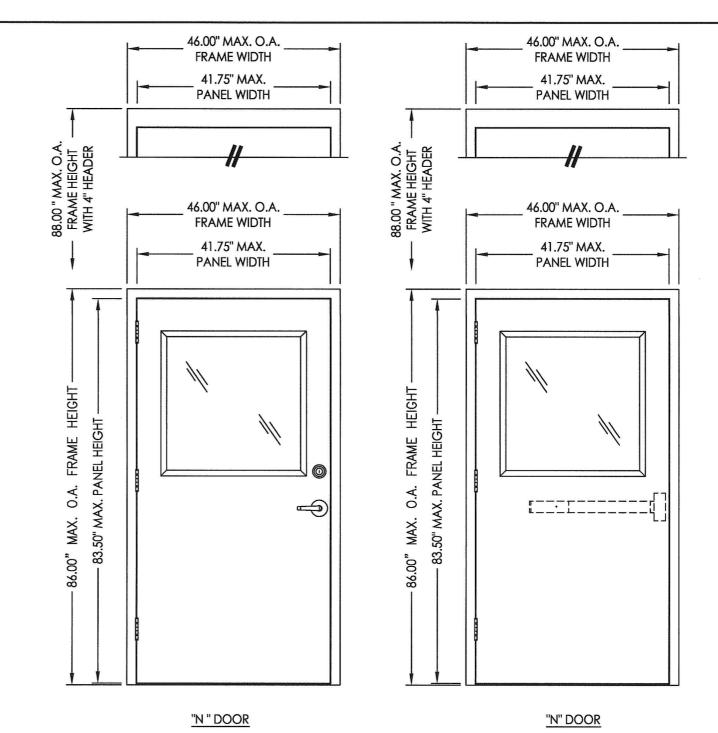

DOOR	FRAME	OVERALL FRAME	MAX	GLASS	LOCK TYPE	DESIGN PRESSURE (PSF)	
TYPE	TYPE	DIMENSION	DIMENSION	TYPE	LOCK TITE	POSITIVE	NEGATIVE
N	2" HEAD	46.00" x 86.00"	X	G1	DESIGN LATCH & DEADBOLT OR VONDUPRIN RIM PANIC HH99EO	+40.0	-40.0
	4" HEAD	46.00" x 88.00"					

Instrucciones de Instalación y Más Detalles Installation Instructions and More Details DATE: 02/18/09
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.:
FL—12161.5

SHEET 1 OF 10

"IMPACT"

MMI PANELS