

PRIV. DE RIO SANTIAGO #30 COL. LA RAZA SOLEDAD DE GRACIANO SANCHEZ SAN LUIS POTOSI, C.P. 78433


## "N" SERIES COMMERCIAL STEEL DOOR W/TRANSOM


## **INSWING / OUTSWING** "NON-IMPACT"


## **GENERAL NOTES**

- This product has been evaluated and is in compliance with the 2007 Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
- Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
- When used in areas requiring wind borne debris protection this product is required to be protected with an impact resistant covering that complies with Section 1609.1.2 of the 2007 FBC.
- 4. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
- 5. The "N" door achieves a Class III stiffness classification per Section 8.2.2 of ANSI A250.13 (based on opaque door).

TABLE OF CONTENTS					
SHEET #	DESCRIPTION	- 5- 244			
1	Typical elevations, design pressures, & general notes				
2	Door panel sections 161 lock prep				
3	Horizontal cross sections				
4	Vertical cross sections	-			
5	Vertical cross sections				
6	Anchoring details				
7 ,	Glazing detail & components				
8	Bill of materials & components				

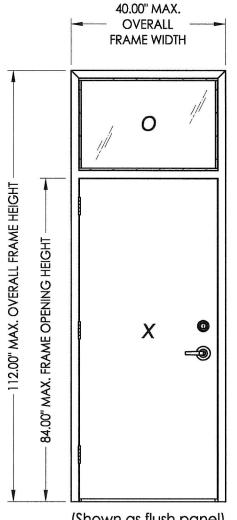



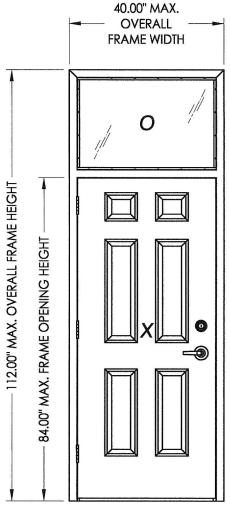

DOOR

STEEL

N.T.S. AL LFS

FL-12186.1

SHEET 1 OF 8

CHK. BY: DRAWING NO .:

(Shown as embossed panel)

OVERALL FRAME	TRANSOM	I OCK TYPE	GLASS	DESIGN PRI	ESSURE (PSF)
DIMENSION	DIMENSION	LOCKTITE	TYPE	POSITIVE	NEGATIVE
40.00" x 112.00"	34.75" × 22.75"	161 LATCH (SCHLAGE)	G1	+55.0	-55.0
		161 LATCH & DEADBOLT (DESIGN HARDWARE)		+65.0	-65.0

Instrucciones de Instalación y Más Detalles Installation Instructions and More Details