

PRIV. DE RIO SANTIAGO #30 COL. LA RAZA SOLEDAD DE GRACIANO SANCHEZ SAN LUIS POTOSI, C.P. 78433


"N" SERIES COMMERCIAL STEEL DOOR W/ SIDELITE

INSWING / OUTSWING "IMPACT"

GENERAL NOTES

- 1. This product has been evaluated and is in compliance with the 2007 Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
- Product anchors shall be as listed and spaced as shown on details.
 Anchor embedment to base material shall be beyond wall dressing or stucco.
- When used in areas requiring wind borne debris protection this product complies with Section 1609.1.2 of the FBC and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E1996.
- 4. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
- 5. The "N" door achieves a Class III stiffness classification per Section 8.2.2 of ANSI A250.13 (based on opaque door).

TABLE OF CONTENTS					
SHEET #	DESCRIPTION				
1	Typical elevations, design pressures, & general notes				
2	Door panel sections 161 lock prep				
3	Horizontal cross sections				
4	Vertical cross sections				
5	Vertical cross sections				
6	Vertical cross sections				
7	Anchoring details				
8	Glazing details & components				
9	Components				
10	Bill of materials & components				

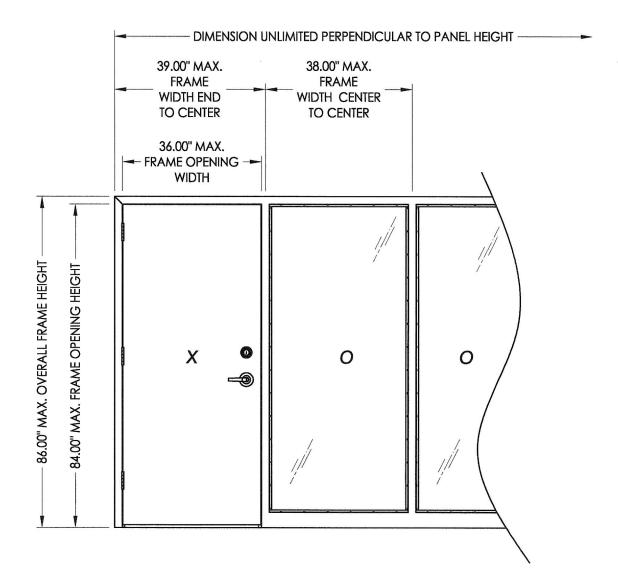

OVERALL FRAME	SIDELITE D.L.O.	LOCK TYPE	GLASS	DESIGN PRI	ESSURE (PSF)
DIMENSION	DIMENSION		TYPE	POSITIVE	NEGATIVE
39.00"	34.75"	161 LATCH (SCHLAGE)	C1 C2	+55.0	-55.0
86.00"	78.75"	161 LATCH & DEADBOLT (DESIGN HARDWARE)	G1, G2	+65.0	-65.0

Instrucciones de Instalación y Más Detalles Installation Instructions and More Details DATE: 02/23/09

SCALE: N.T.S.

DWG. BY: AL

CHK. BY: LFS

DRAWING NO.:

FL-12186.6

SHEET 1 OF 10